

INSTALLATION MANUAL · BREEZE LINE

Open slatted panel for room dividers and pergolas

INSTALLATION SYSTEM


Breeze is an **open** slatted panel, assembled in columns fixed to **ceiling and floor tracks**. It divides rooms without closing them off and can also be used as a pergola. We recommend installation by a qualified professional.

REQUIRED TOOLS

- PPE (personal protective equipment)
- Tape measure, pencil and level
- Utility knife and miter (45°) saw, preferably electric
- Compressor and pneumatic brad nailer, with F25 brads
- Screws, wall anchors, drill bits and screwdriver
- Cyanoacrylate glue (or PU-40)
- Cleaning cloth

1. PANEL PREPARATION

1. Open the box and set aside the manual, slats and spacers.
2. If needed, cut the pieces to size with the miter (45°) saw.
3. Assemble the tracks and columns, fixing the slats to the spacers with a little cyanoacrylate glue in the slat channels.

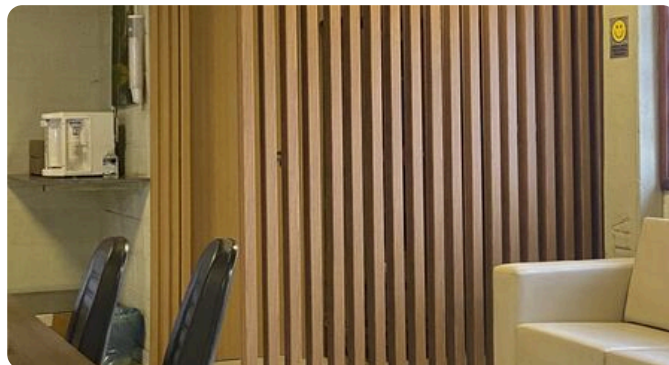

2. INSTALLING CEILING AND FLOOR TRACKS

1. Cut the ceiling and floor tracks to the opening size and place a finishing slat on the ends.
2. On the floor track, fix the support blocks (included in the box) underneath, so the piece does not touch the floor directly.
3. Fix the tracks with screws and wall anchors, approximately **one screw every 40 cm**.

3. FIXING THE COLUMNS

1. Fit the columns into the track channel.
2. Fix each column with the pneumatic brad nailer and F25 brad.
3. Column spacing is free and follows your design.
4. Finish the brad heads with the wood filler included in the box.

INSTALLATION MANUAL · BREEZE LINE (continued)

Open slatted panel for room dividers and pergolas

4. USE AS A PERGOLA

On the ceiling, Breeze follows the same track and column logic. In covered areas, follow the same instructions. For outdoor areas, ask technical support about the suitable material before buying.

IMPORTANT: failure to follow these instructions may compromise the bond and durability of the product and void the warranty. For questions, contact our technical support.

CLEANING AND MAINTENANCE

Use only a cloth slightly dampened with water. If needed, use a soft sponge with mild soap and dry right away. Do not use abrasive products.

TECHNICAL SHEET

Product. Open MDF slatted panel with melamine finish, assembled in columns with ceiling and floor tracks.

Length. 2.70 m bars. For greater heights, ask technical support.

Box contents. Slats, spacers, tracks, support blocks and wood filler, depending on the model, as stated in the price list and on the box label.

Application areas. Indoor use, in dry areas. Not suitable for wet areas (such as shower stalls), outdoor areas or direct sunlight, which may change the finish color. Maximum recommended temperature of 50 °C, to avoid expansion.

Coastal areas. MDF panels are not affected by the normal humidity of coastal environments, as long as they are installed in an indoor, dry area.

Storage. Store boxes flat, off the floor, in a clean, dry place, with no weight on top that could dent the profiles.

WARRANTY TERMS · BREEZE LINE

Open slatted panel for room dividers and pergolas

WARRANTY TERMS

1. Scope. These terms apply to the Breeze MDF slatted panel with melamine finish. The factory warranty covers:

- warped or misaligned bars;
- width difference over 2 mm between bars of the same code;
- bars shorter than stated on the invoice;
- factory defects in the finish.

Remember: an installed product is considered ACCEPTED.

2. Claims. Barreto responds within 7 business days to anyone who registers a claim with customer service. Contact must be made by the customer holding the Barreto invoice (retailer, reseller or distributor).

3. Technical assistance. Within 30 business days after notification, Barreto may, at its discretion: replace the product, replace the defective part or repair the product.

4. The warranty does not cover:

- installation other than as shown in this manual;
- irregular walls, with bulges, unevenness, texture, moisture or uncured paint;
- use in wet areas, outdoors or in direct sunlight, when the product is not suited for it;
- misuse, impact or maintenance other than as recommended;
- paint or adhesive tape applied by the customer over the factory finish;
- dimensional changes caused by temperature (expansion);
- loss of gloss and slight tone variation between sample and product.
- fixing the tracks without screws and wall anchors.

5. Term. 5 years from the date of the purchase invoice issued by Barreto.

Barreto is not responsible for product installation. Barreto may update this document without prior notice.